

VALIANT COMMUNICATIONS LIMITED



V.35 to 10BaseT Interface Converter

Product Brochure & Data Sheet

VALIANT COMMUNICATIONS LIMITED

71/1, Shivaji Marg, New Delhi - 110015, India

Phone: +91-11 4105 5601, +91-11 4105 5602,
+91-11 4105 5603, +91-11 2592 8415,
+91-11 2592 8416, +91-11 2541 0053

Fax: +91-11 4105 5604, +91-11 2543 4300

E-mail: getinfo@valiantcom.com

Website: <http://www.valiantcom.com>

VALIANT COMMUNICATIONS (UK) LTD

1, Acton Hill Mews,
300-328 Uxbridge Road,
London W3 9QN
United Kingdom

E-mail : uk@valiantcom.com

Website: <http://www.valiantcom.com>

Product Overview

The **V.35 to 10BaseT Interface Converter** is a high performance self-learning remote Ethernet bridge which converts a V.35 interface to a 10Base-T Ethernet. With a small size and low cost, it is ideal for low cost Ethernet bridge applications.

Front View



V.35 to 10BaseT Interface Converter


It can learn the MAC addresses in the linked LAN continuously.

Up to 10,00 MAC addresses can reside in its LAN memory, which are updated automatically. The highest transmitting and filtering rate is 30,000 frames per second (line speed). The buffer is capable of storing 256 frames with a waiting throughput of one frame. When applied as a LAN extender, the bridge has two working status, filtering and not filtering.

Features:

- Conversion between 10Base-T Ethernet interface and V.35 interface
- User selectable V.35 data rate - $N \times 64K$ ($N=1 \sim 32$)
- Provides three clocking modes for maximum flexibility
- Phase self-adaptation of data transmission and clock
- User defined / User selectable time-slot allocation
- LED indicators to indicate alarms and operating status

Typical Application

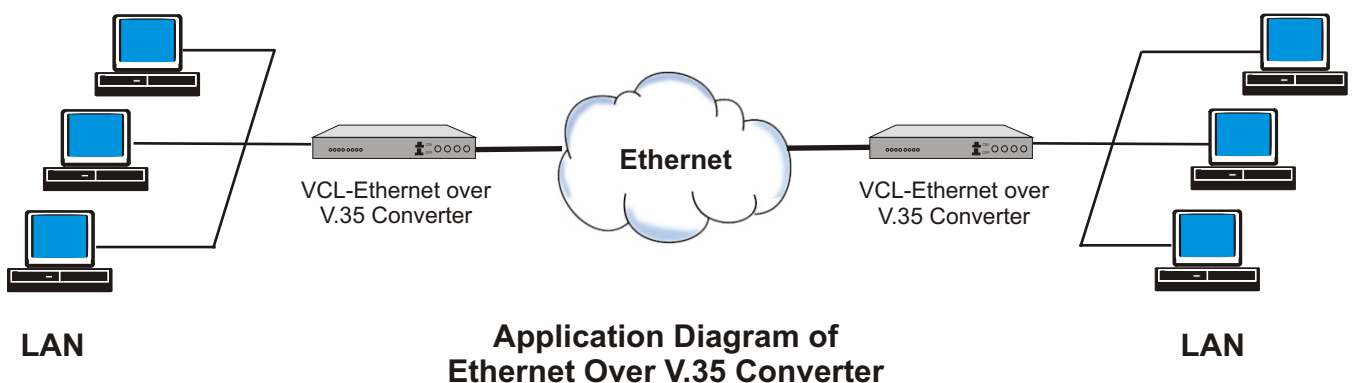

Technical Specifications**10BaseT Interface Standard**

Bit rate	2048Kbit/s (maximum throughput data)
Standard	IEEE802.3
Interface rate	10Mbit/s
Interface type	RJ-45

V.35 Interface Standard

Bit rate	Adjustable
Clock mode	Internal clock / Line clock / External clock
Code rate	N×64K, user selection of time-slots in E1
Interface type	V.35 / DCE
Electrical character	ITU-T V.35 compliant
Terminal standard	ISO2593 (M34) Connector

Environment

Power supply	Option of 220V AC or - 48V DC power
Power consumption	≤5W
Operating temperature	-5°C to 50°C
Storing temperature	-40°C to +70°C
Relative humidity	10% to 90% none condensing

Physical

Standalone (19"/2)	
Dimensions	200mm (Width) × 43.5mm (Height) × 150mm (Depth)
Weight	0.8 kg
Rack type	EIA 19" Inch Rack Mountable Shelf

Ordering Information

S No.	Part #	Product Description	Qty
1.	VCL-V35-ETH	V.35 to 10Base-T Interface Converter	1

Notes : _____

Technical specifications are subject to change without notice.
All brand names and trademarks are the property of their respective owners.
Revision 02 - March 05, 2008

VALIANT COMMUNICATIONS LIMITED

71/1, Shivaji Marg, New Delhi - 110015, India
Phone: +91-11 4105 5601, +91-11 4105 5602,
+91-11 4105 5603, +91-11 2592 8415,
+91-11 2592 8416, +91-11 2541 0053
Fax: +91-11 4105 5604, +91-11 2543 4300
E-mail: getinfo@valiantcom.com
Website: <http://www.valiantcom.com>

VALIANT COMMUNICATIONS (UK) LTD

1, Acton Hill Mews,
300-328 Uxbridge Road,
London W3 9QN
United Kingdom
E-mail : uk@valiantcom.com
Website: <http://www.valiantcom.com>