

VCL-2156 NTP TIME SERVER

GPS / GNSS / NavIC Primary Reference Clock

India's Strategic Timing Autonomy

A National Imperative for Power Utilities, Defence,
Financial Systems & Critical Infrastructure

NavIC: India's Navigation & Timing Sovereignty

WHY NavIC MATTERS

- ★ Independence from foreign-controlled GPS (USA), GLONASS (Russia) & Galileo (EU)
- ★ Post-Kargil War (1999): GPS access was denied to India during critical operations — NavIC was born from this strategic lesson
- ★ Provides India a sovereign, secure & reliable positioning and timing capability
- ★ Critical for Defence, Power Grids, Banking and national infrastructure
- ★ Aligned with India's Atmanirbhar Bharat vision and Digital India goals.

STRATEGIC CONTEXT

“

The 1999 Kargil War exposed India's dependence on foreign navigation systems. When GPS data was restricted, India's military was severely disadvantaged. NavIC was India's response — an indigenous system that cannot be switched off.

”

Defence

Power Utilities

Banking & Finance

Oil & Gas

Railways

Critical Infra

The Timing Imperative: What's at Stake?

Power Grid Failure

A timing error of just microseconds can cause frequency deviation, phase mismatch and cascade failures across the national grid. SCADA systems require nanosecond-accurate synchronization.

Financial Fraud Risk

Stock exchanges, payment systems and banking networks require sub-millisecond timestamp accuracy. GPS spoofing can alter transaction timestamps enabling fraud.

Defence Vulnerability

Military communications, radar systems and missile guidance require Stratum-1 timing. Reliance on foreign GPS creates a critical attack vector in conflict scenarios.

Critical Infrastructure

Telecom 5G networks, oil & gas pipelines, railway signalling and airports require precise time synchronization. Outages can cascade into national emergencies.

VCL-2156 NTP Time Server: Product Overview

NTP Stratum-1

NTP Check



Mode: 3 - Client
Leap Indicator: 0 - No Warning
Stratum: 1 - Primary Reference
Version Number: 3
Poll Interval: 8
Precision: 4.41711766194596E+71
Root Delay: 0
Root Dispersion: 1.0986328125
Reference ID: GPS
Reference Timestamp: 04-11-2025 05:40:33 PM
Originate Timestamp: 04-11-2025 05:40:41 PM
Receive Timestamp: 04-11-2025 05:40:41 PM
Transmit Timestamp: 04-11-2025 05:40:41 PM
Round Trip Delay: 4
Local Clock Offset: 56

NTP Server (Hostname or IP Address)
192.168.1.102

Test Help

Standard

ITU-T G.811 Primary Reference Clock (Stratum 1)

Constellations

GPS, GLONASS, Galileo, NavIC (Dual Band L1+L5)

NTP Performance

Up to 7,500 requests/sec | 40,000 NTP Slaves

Holdover

OCXO G.812 compliant — <9μs over 24 hours

Resilience

Anti-jamming, Anti-spoofing, 1+1 NTP Peering

Ports

4+1 × 10/100BaseT Ethernet | IPv4/IPv6 dual stack


Supports upstream NTP input for synchronization from external time sources (e.g., CSIR-NPL NTP Server (IST))

ITU-T G.811 Stratum 1 | MTBF ≥42 Years | IP20 Ingress Protection

Dual-Band GNSS: L1 + L5 with NavIC Support

Advantages of Dual Band constellations (L1+L5) in GNSS Clocks

Dual-band GNSS antenna (L1 + L5)

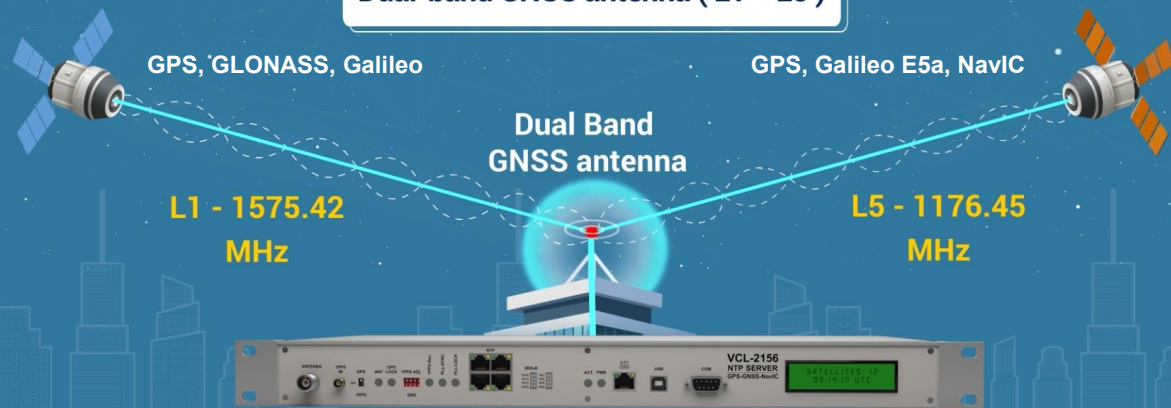

VCL-2156 receives both L1 (1575.42 MHz) and L5 (1176.45 MHz) signals

It synchronizes directly with UTC using multiple satellite constellations and distributes precise time and frequency output connected systems

NavIC on L5

India's own NavIC satellites transmit on the L5 band (1176.45 MHz) — VCL-2156 locks directly to NavIC.

Spoofing Defence

Dual-frequency design makes it exponentially harder to simultaneously spoof both L1 and L5 bands.

Resilience

If one band is jammed, Dynamic Satellite Selection automatically switches to the other, maintaining lock.

VCL-2156 tracks up to 50 satellites simultaneously across both L1 and L5 bands

NavIC Current Status & VCL-2156 Resilience

⚠ Context: IRNSS-1F (launched March 2016) completed its 10-year design mission life on 10 March 2026 and has experienced atomic clock failure. ISRO plans next-generation NVS-03/04/05 launches to augment the NavIC constellation.

WHY VCL-2156 REMAINS FULLY RELIABLE

- ✓ Fixed NTP server: does NOT need to calculate latitude / longitude / altitude — it only needs satellite signals to discipline its internal clock
- ✓ Only 3 NavIC satellites required for time synchronization in fixed timing applications (vs 4 needed for mobile navigation)
- ✓ 6 user-selectable constellation modes: GPS, GPS+GLONASS, GPS+NavIC, NavIC-only, GPS+Galileo, All Constellations
- ✓ In 'All Constellation' mode: Tracks up to 50 satellites — immunity to single constellation failure
- ✓ OCXO holdover maintains stability for ± 3 ppb with complete GNSS signal loss

INDIA'S NavIC ROADMAP

Present

7 operational NavIC satellites; 3 sufficient for NTP time sync in fixed applications

Near-term

NVS-01 (2023) — 2nd generation satellite with improved civilian signal on L1 band

Planned

NVS-03, NVS-04, NVS-05 to augment base constellation with enhanced features

Vision

Global navigation capability; independent from all foreign GNSS systems

Power Utilities & Defence: Mission-Critical Timing



POWER UTILITIES

- › Synchronization of Protection Relay Systems — prevents tripping cascades
- › SCADA / IEC 61850 substation automation requires Stratum-1 timing
- › Phasor Measurement Units (PMUs) need $\leq 1\mu\text{s}$ accuracy for wide-area monitoring
- › Provides precise frequency synchronization with 2.048 MHz and 10 MHz outputs, along with 1PPS timing, ensuring accurate teleprotection and reliable frequency synchronization.
- › EN61000-4-5 Level 3 — built for harsh electrical substation environments
- › IRIG-B outputs for integration with protection and control systems



DEFENCE & SECURITY

- › Air-gapped deployment: no reliance on external internet NTP sources
- › NavIC-locked timing: 100% indigenous signal — cannot be denied by foreign entities
- › Anti-jamming and anti-spoofing with Dynamic Satellite Selection
- › IRIG-B for military communication and radar synchronization
- › MD5/SHA1 authenticated NTP, SNMPv3 encrypted management
- › RADIUS server authentication, SSH and clear-text protocol option

ADVANTAGE: Both sectors benefit from the VCL-2156's OCXO holdover capability — maintaining $<9\mu\text{s}$ accuracy for 24 hours even during a complete GNSS blackout, with automatic failover to secondary NTP server.

Financial Systems & Critical National Infrastructure

Banking & Financial Exchanges

- ✓ BSE/NSE require timestamp accuracy to microseconds — GPS spoofing can enable front-running fraud
- ✓ RBI / SEBI mandated time-stamping for trade records and audit trails
- ✓ NavIC-locked NTP server provides sovereign time not subject to foreign manipulation
- ✓ 40,000 NTP slaves: supports entire bank network from a single appliance

Oil & Gas / Industrial

- ✓ Pipeline SCADA systems require synchronized timing for leak detection and safety valves
- ✓ Offshore platforms in GPS-denied environments benefit from NavIC's Indian Ocean coverage
- ✓ 2.048 MHz and 2.048Mbits E1 clock outputs for legacy telecom integration
- ✓ IP20 ingress protection and industrial Ethernet for harsh environments

Railways & Airports

- ✓ Train protection, signalling ATP/ATC systems require sub-millisecond time sync
- ✓ Platform systems, ticketing and public information boards all require NTP
- ✓ IRIG-B outputs for legacy signalling integration across rail networks
- ✓ Dual redundant power (AC and DC) for 24/7 mission-critical uptime

Security Architecture: Built for India's Threat Landscape

Signal Security	Network Security	Access Control	Resilience
▶ Dual-band anti-jamming (L1+L5) ▶ Anti-spoofing with signal validation ▶ Automatically switches to the alternate band if one is jammed, ensuring continuous satellite lock. ▶ Dynamic Satellite Selection (DSS) ▶ NavIC indigenous — not foreign-controlled	▶ MD5 / SHA1 NTP authentication ▶ SSH encrypted management ▶ RADIUS server authentication ▶ Enable / Disable Telnet for NERC compliance	▶ Encrypted password control ▶ Password strength monitoring ▶ Role-based access (GUI) ▶ SNMPv3 encrypted traps	▶ 1+1 NTP Peering redundancy ▶ OCXO holdover ▶ Auto-failover to secondary NTP ▶ Dual redundant power supply

VCL-2156 is designed for air-gapped, isolated networks — no dependency on public internet or foreign NTP infrastructure

Why Valiant Communications: Aligned with Atmanirbhar Bharat

NavIC Native

One of very few NTP servers globally offering native NavIC support on L5 band — critical for India's timing sovereignty.

Proven & Deployed

Deployed across Indian Railways, power utilities, banking networks, defence installations and telecom operators.

Indian Manufacturer

Designed and manufactured in India by Valiant Communications Limited — aligned with Make in India and Atmanirbhar Bharat.

Comprehensive Time & Frequency Outputs

NTP, IRIG-B, 2.048 MHz, 2.048MBits E1, 10 MHz, 1PPS, PPM/PPH, NMEA — a single appliance serves all synchronization needs.

Applications

- ✓ Government and Defense
- ✓ Banking Sector
- ✓ Power Utilities
- ✓ Data Centers
- ✓ Telecom Networks
- ✓ Railways
- ✓ Airport and ATS



42 yrs

MTBF

7,500

NTP req/second

250K

SNTP Slaves

OCXO

Holdover

6

Constellations

GNSS Threat Landscape: Jamming & Spoofing

Why dual-band, multi-constellation security is non-negotiable for India's critical infrastructure



JAMMING

Deliberate radio-frequency interference that overwhelms or blocks GNSS signals across a region. Single-band receivers lose lock instantly. L1-band jammers are commercially available and widely used in conflict zones.



SPOOFING

Transmission of counterfeit GNSS signals that deceive a receiver into reporting a false position or time. Can silently alter timestamps in power grids, financial exchanges or defence systems without triggering any alarm.



MEACONING

Re-broadcast of captured GNSS signals with deliberate delay, causing systematic time errors. Particularly dangerous for timing-sensitive infrastructure such as protection relays and trading platforms.

VCL-2156 GNSS SECURITY FRAMEWORK

- ✓ **Dual-Band L1 + L5**
Simultaneous tracking — cannot be jammed on both frequencies simultaneously
- ✓ **Dynamic Satellite Selection**
Real-time quality monitoring; auto-switches to uncompromised band under attack
- ✓ **T-RAIM Integrity Monitoring**
Time Receiver Autonomous Integrity Monitoring eliminates anomalous satellites algorithmically
- ✓ **Signal Structure Verification**
Algorithm-driven validation of signal codes, structure and timing — detects spoofed signals
- ✓ **Multi-Constellation Tracking**
GPS + GLONASS + Galileo + NavIC — attacker must compromise all four simultaneously
- ✓ **Inbuild GNSS Signal Monitoring**
Live C/N₀ monitoring and interference detection built into the GNSS management tool

How VCL-2156 Defeats Jamming & Spoofing



Multi-layer GNSS security architecture — algorithmic, hardware and protocol-level protection

1 Dual-Band Reception

L1 (1575 MHz) and L5 (1176 MHz) received simultaneously by a single dual-band antenna

2 C/N₀ Monitoring

Carrier-to-noise ratio monitored per satellite per band — live spectrum analyser detects interference spike

3 T-RAIM Screening

Anomalous satellite signals excluded algorithmically; only verified signals enter the timing solution

4 Band Fallback (DSS)

Dynamic Satellite Selection auto-switches to uncompromised band; alert raised. Timing never lost.

KEY TECHNOLOGIES: T-RAIM · Dual-Band L1/L5 · Multi-Constellation (GPS + GLONASS + Galileo + NavIC) · Dynamic Satellite Selection (DSS)

6 USER-SELECTABLE MODES:

GPS only

GPS + GLONASS

GPS + NavIC

NavIC only

GPS + Galileo

**All Constellations
(50 Satellites)**

Armed Forces PoC: Satisfactory Testing & Validation

VCL-2156 NTP Time Server — Proof of Concept with the Armed Forces

PROOF OF CONCEPT — Validation of VCL-2156 NTP Server with Jamming and Spoofing Behaviour Analysis



Jamming & Spoofing (L1 & L5 bands)— The VCL-2156 NTP Server and Clients demonstrated stable performance during jamming and spoofing testing. All operations recovered normally after the test conditions were removed.



Army Headquarter NTP Client behaviour — During the jamming and spoofing tests, the time of the NTP clients remained stable and unchanged. The time and location information of the NTP clients were not compromised at any point during the PoC testing.



Network Time Synchronization Test — PASSED: GPS-based NTP Server successfully synchronized all LAN devices. Stratum-1 output confirmed with GPS as Reference ID.



NTP Security Authentication Test — PASSED: MD5 and SHA1 key-based authentication verified via GUI and CLI. Only authenticated clients able to synchronize — unauthenticated clients correctly rejected.

PoC TEST RESULT

```

UCL-2156>gss=showsatinfo
GSS MODE:GPS + NavIC
TELETYPE INFORMATION GSS TALKER: GPS and NavIC
NMEA ID : 01-32
NO OF SATELLITES IN VIEW: 25
NO OF KKGSS MSGS      1 2
# SNo.  C No.  C ID  PRN NO.  C2W ID  ELEVATION (deg)  AZIMUTH (deg)  C/Mn (SNR)
1      GP-L1CA  877      66      354      43
2      GP-L1CA  088      43      042      41
3      GP-L1CA  099      42      200      41
4      GP-L1CA  308      42      324      37
5      GP-L1CA  852      33      106      43
6      GP-L1CA  14      27      281      42
7      GP-L1CA  081      17      141      30
8      GP-L1CA  040      12      149      32
9      GP-L1CA  22      16      269      37
10     GP-L1CA  17      15      214      26
11     GP-L1CA  27      12      040      09
12     GP-L5    088      43      040      46
13     GP-L5    308      42      324      40
14     GP-L5    099      42      200      37
15     GP-L5    14      27      281      43
16     GP-L5    21      15      141      33
17     GP-L5    081      12      149      40
18     GP-L5    27      12      040      27
19     G1-L5-SPE 82      46      240      30
20     G1-L5-SPE 099      40      234      40
21     G1-L5-SPE 108      37      114      45
22     G1-L5-SPE 086      37      256      37
23     G1-L5-SPE 83      000      44
24     G1-L5-SPE 05      000      32
25     G1-L5-SPE 077      000      43
<<<<<< End of Sat Info >>>>>>

```

Dual Band: Test on GPS L1 & L5, NavIC L5 band

Jamming: L1 and L5 band

Spoofing : Different coordinates

PoC Result: The time and location of the NTP clients was not compromised

CONCLUSION: The VCL-2156 NTP Time Server has successfully completed Proof of Concept testing with the Armed Forces across all four test scenarios — Jamming & Spoofing (L1 & L5 bands), Army Headquarter NTP Client behaviour, Network Time Synchronization Test and Security Authentication — achieving satisfactory results in every test case.

VCL-2156: Technical Specifications

GNSS Receiver

- 62-channel GNSS + 50 satellites | L1 (1575.42 MHz) + L5 (1176.45 MHz)
- GPS, GNSS, GLONASS, Galileo, NavIC | Hot start: 1s | Cold start: 28s
- Tracking: -165 dBm | Antenna: TNC (Active, IP67, -40°C to +85°C)

Timing Accuracy

- $\pm 30\text{ns}$ referenced to GPS | $\pm 20\text{ns}$ referenced to GNSS
- $\pm 15\text{ns}$ compensated (GPS+GNSS) | $< 9\mu\text{s}$ holdover over 24 hours
- OCXO stability: $\pm 3\text{ppb}$ | 1-day aging: $\pm 0.4\text{ppb}$

NTP Performance

- Up to 7,500 NTP requests/second | 40,000 NTP Slaves | 250,000 SNTP Slaves
- NTP v2/v3/v4 (RFC 1119/1305/5905) | MD5/SHA1 authentication
- 1+1 NTP Peering | Unicast, Multicast, Broadcast | IPv4/IPv6 dual stack

Outputs

- $4+1 \times 10/100$ Ethernet NTP | 1PPS, 2.048MHz, 10MHz | IRIG-B (Modulated + Unmodulated)
- NMEA ToD, 1PPM/1PPH, E1 2.048Mbits | Expansion chassis 2U: up to 16 additional PPS and IRIG-B (DCLS RS485 / RS422, RS4232, Optical, BNC) outputs

Standards

- ITU-T G.811 (Stratum 1) | ITU-T G.812 Holdover | EN61000-4-5 Level 3
- CE 2014/30/EU | IEC 60950 | RoHS Compliant | MTBF ≥ 42 years (Telcordia)

Form Factor

- 1U rack mount (19/21/23 inch) | 44x482x228mm | $< 20\text{W}$ power | Convention cooled
- Dual redundant power: AC 100-240V or DC 24/48/110-220V | Reverse polarity protection

VCL-2156 NTP Server – Hardware Purchase Options

The NTP Server is available with **three GNSS configuration options**, allowing customers to select the most suitable model based on operational, security, and resilience requirements.

Option #1 – GPS (L1)

- ✓ Supported Satellite Constellation: **GPS only**
- ✓ Frequency Band: **L1**
- ✓ Suitable for standard timing applications where single-constellation GPS support is sufficient.

Option #2 – Dual-Band Multi-GNSS Clock with Jamming & Spoofing Detection

- ✓ Supported Satellite Constellations: GPS, Galileo (E5a), NavIC
- ✓ Frequency Bands: **L1** (GPS, Galileo) and **L5** (GPS, Galileo E5a, NavIC).
- ✓ Features:
GNSS jamming detection alerts
GNSS spoofing detection alerts
- ✓ Suitable for critical infrastructure applications requiring enhanced reliability and signal monitoring.

Option #3 – Dual-Band Multi-GNSS Clock with Anti-Jamming & Anti-Spoofing

- ✓ Supported Satellite Constellations: GPS, GLONASS, Galileo (E5a), NavIC
- ✓ Frequency Bands: **L1** (GPS, GLONASS, Galileo) and **L5** (GPS, Galileo E5a, NavIC).
- ✓ Features:
Advanced anti-jamming protection
Advanced anti-spoofing mechanisms
- ✓ Robust signal validation and interference detection
- ✓ Automatically switching to the other band if any one band is jammed to maintain satellite lock and provide the alert.
- ✓ **Designed for high-security and mission-critical environments requiring maximum GNSS resilience.**

Note: All NTP Server configuration options support the **same input and output interfaces, protocols, and timing outputs**. The differences between the options are limited **only to the supported GNSS constellations and security features**.

Securing India's Timing Future

VCL-2156 NTP Time Server with NavIC

- ✦ NavIC is India's sovereign timing asset — VCL-2156 is its ideal infrastructure partner
- ✦ Only 3 NavIC satellites required for fixed NTP time synchronization
- ✦ Dual-band L1+L5 ensures resilience against jamming, spoofing and constellation failures
- ✦ ITU-T G.811 Stratum 1 precision for Power, Defence, Banking & Critical Infrastructure

VALIANT COMMUNICATIONS LIMITED

INDIA
71/1 Shivaji Marg, New Delhi 110015
mail@valiantcom.com

USA
Coral Gables, FL, USA
us@valiantcom.com

UK
Hampton Hill, Middlesex, UK
gb@valiantcom.com

www.valiantcom.com