



VCL-9025, Optical Multiplexer


Introduction:

VCL-9025, 4 Channel Optical Multiplexer is 1U high 19" Rack mountable unit with high-availability, high-performance Optical Multiplexer that can be used to multiplex and carry up to 4 single-mode optical channels over a single optical fiber pair in a point-to-point connectivity.



The distinctly separate, four wavelength ports of the VCL-9025 operate using the WDM band channels between 1471nm to 1591nm to provide a high degree of physical isolation between each channel.

The VCL-9025 Optical Multiplexer is best used to fully utilize the upper WDM channels in the region where the SM fiber attenuation is the lowest.



**Four Channel Optical Multiplexing
Optical Scheme**

The VCL-9025 works within the operating temperature range of 0°C to +70°C which gives an extended application range without requiring temperature control. The multiplexer is available in a 1 RU chassis with LC connectors.

Features:

- Low Insertion Loss
- Wide Passband
- Very High Channel Isolation. Suitable for multiplexing IT and OT transmission links over a single optical fiber pair without compromising cyber-security.
- High stability and reliability over an extended temperature range.
- Compact size

Application Scenarios:

Multiplexing up to 4, 10G Ethernet, 1G Ethernet, STM-1, STM-4, STM-16, IEEE C37.94 Differential Protection Channels, in any combination, over a single optical fiber pair.


Physical Dimension:

- 19-inch, 1U High Rack Mount
- D x W x H: 177mm x 484mm x 44mm




4 CHANNEL MULTIPLEXING OVERVIEW AND PORT ALLOCATION

Line Rx	1471 Tx	1511 Tx	1551 Tx	1591 Tx
Line Tx	1471 Rx	1511 Rx	1551 Rx	1591 Rx

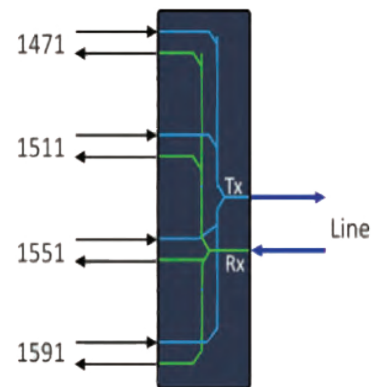

Typical Application Block Diagram:

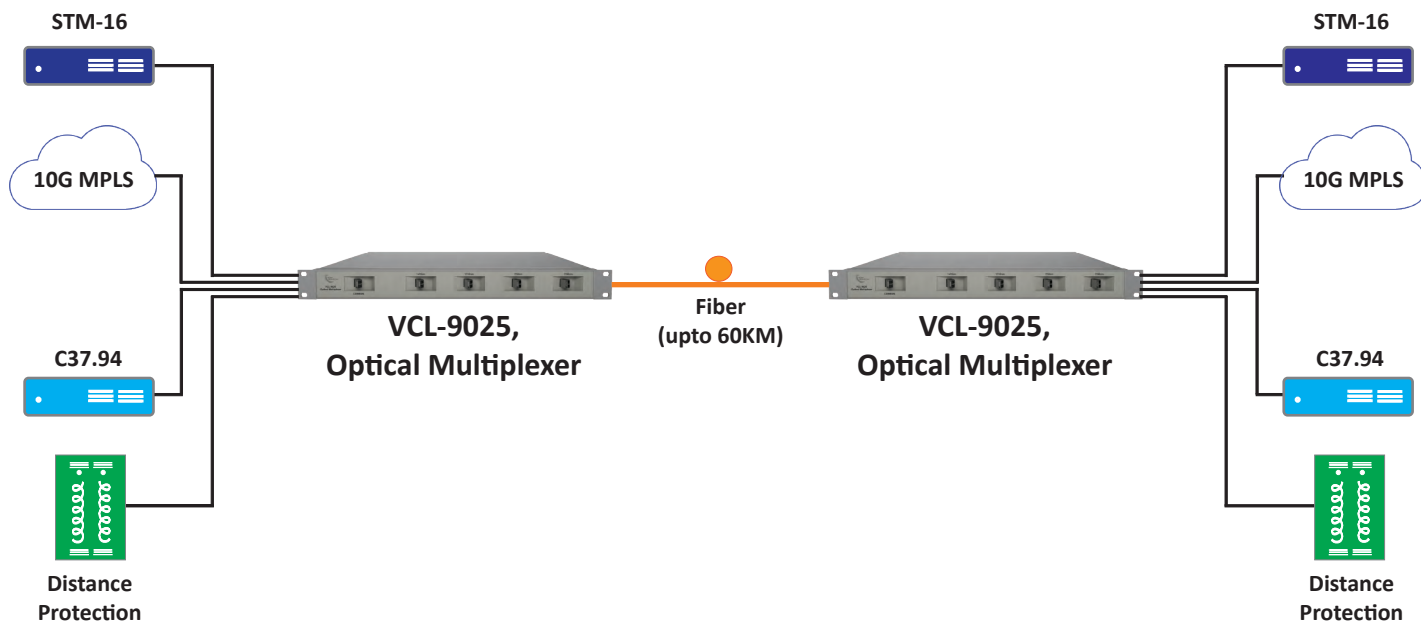

Environmental (Operational):

Operating Temperature	-0C~ 70C
Storage Temperature	-40°C~ 85°C
Operating Humidity	10%~95% relative humidity, non-condensing
Storage Humidity	10%~95% @40°C; non-condensing



Technical Specifications:

Parameter				Unit	Values
Channels				CH	4
Centre Wavelength				nm	1471, 1511, 1551, 1591
Passband Channels			Min.	nm	+/-6.5
Isolation	Mux	Adjacent Channel	Min.	dB	30
		Non-adjacent Channel	Min.		45
	Demux	Adjacent Channel	Min.		30
		Non-adjacent Channel	Min.		45
Insertion Loss			Max.	dB	1.8
Ripple in Passband			Max.	dB	0.5
Directivity			Min.	dB	55
Polarization Dependent Loss			Max.	dB	0.2
Polarization Mode Dispersion			Max.	ps	0.10 (GD)
Return Loss			Min.	dB	50
Power Handling			Max.	mW	500
Fiber Type					1510n, Single Mode, Corning SMF-28 or Equivalent
Connector Type					LC

Note:

1. All specifications include the effect of operating temperature and all states of polarization.
2. Values referenced without connectors and insertion loss for a connector -pair is 0.20dB (typ.) and 0.30dB (max.).

Ordering Information (Base Unit):

Part No.:	Description
VCL-9025-4	<p>VCL-9025, 4 Channels Optical Multiplexer</p> <p>19-inch, 1U high, Rack Mount version</p> <ul style="list-style-type: none"> - 4 x Optical Inputs: Single Mode 1471nm, 1511nm, 1551nm, 1591nm - 1 x Multiplexed Optical Output - Connector type - LC/UPC - Installation Kit: System Core Cables, Mounting Hardware, Documentation.

© Copyright. All Rights Reserved.

Revision 1.5, January 03, 2025

U.S.A.

Valcomm Technologies Inc.
4000 Ponce de Leon Blvd.,
Suite 470, Coral Gables,
FL 33146, U.S.A.
E-mail: us@valiantcom.com

U.K.

Valiant Communications (UK) Ltd
Central House Rear Office
124 High Street, Hampton Hill
Middlesex, TW12 1NS, U.K.
E-mail: gb@valiantcom.com

INDIA

Valiant Communications Limited
71/1, Shivaji Marg,
New Delhi - 110015,
India
E-mail: mail@valiantcom.com